


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon





All materials must meet Greenconn's requirements for environmental protection.

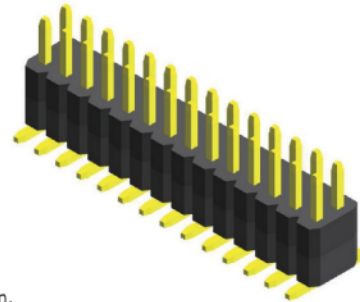

Mating with



B20

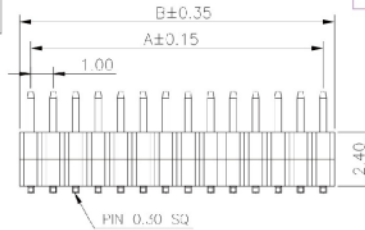

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	1.00	2.00	11	10.00	11.00	21	20.00	21.00	31	30.00	31.00
03	2.00	3.00	12	11.00	12.00	22	21.00	22.00	32	31.00	32.00
04	3.00	4.00	13	12.00	13.00	23	22.00	23.00	33	32.00	33.00
05	4.00	5.00	14	13.00	14.00	24	23.00	24.00	34	33.00	34.00
06	5.00	6.00	15	14.00	15.00	25	24.00	25.00	35	34.00	35.00
07	6.00	7.00	16	15.00	16.00	26	25.00	26.00	36	35.00	36.00
08	7.00	8.00	17	16.00	17.00	27	26.00	27.00	37	36.00	37.00
09	8.00	9.00	18	17.00	18.00	28	27.00	28.00	38	37.00	38.00
10	9.00	10.00	19	18.00	19.00	29	28.00	29.00	39	38.00	39.00
			20	19.00	20.00	30	29.00	30.00	40	39.00	40.00

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:

CHECKED:

AUD TED:

APPROVED:

DATE:

DATE:

DATE:

DATE:

DWG. NO.

XB-PZ-C-10-201

PART NO.

XB-PZ-C-10-201

TITLE.

2.00 FEMALE HEADER
 SINGLE ROW DIP TYPE
 BASE 4.30H