


Specifications  
 Current Rating:1.0Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:300VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material  
 All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board Layout  
 (Tolerance:±0.05)




Dim.F	NOTE
3.00mm	03pins
4.00mm	04~15pins

No. of PIN/ROW	Dimension Information	
	L	M
02	2.20	1.00
03	3.20	2.00
04	4.20	3.00
05	5.20	4.00
06	6.20	5.00
07	7.20	6.00
08	8.20	7.00
09	9.20	8.00
10	10.20	9.00
11	11.20	10.00
12	12.20	11.00
13	13.20	12.00
14	14.20	13.00
15	15.20	14.00

### Ordering Information

**XB-PZ-D-10-210**

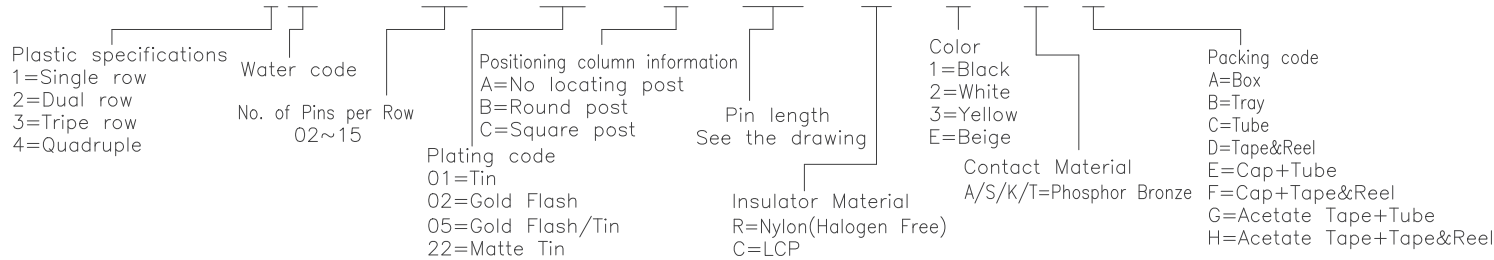

**东莞市溪榜电子有限公司**  
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DWG. NO.  
**XB-PZ-D-10-210**  
 PART NO.  
**XB-PZ-D-10-210**

TITLE.  
 1.00 PIN HEADER  
 DUAL ROWS SMT TYPE  
 CONNECTOR