


Specifications  
 Current Rating:3.0Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:  
 Brass(Pin length less than 25mm)  
 Phosphor Bronze(The total length of pin is more than 25mm)  
 Insulator Material:  
 Nylon(High temperature resistance),  
 LCP(High temperature resistance),  
 UL 94V-0  
 All materials must meet Greenconn hazardous substances control standards.

No. of PIN/ROW	Dimension Information	
	M	L
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20

Recommended P.C.Board Layout  
 (Tolerance:±0.05)



### Ordering Information

**XB-PZ-D-254-105**

Plastic specifications  
 1=Single row  
 2=Dual row  
 3=Tripe row  
 4=Quadruple

Water code

Positioning column information  
 A=No locating post  
 B=Round post  
 C=Square post

Plating code  
 01=Tin  
 02=Gold Flash  
 05=Gold Flash/Tin  
 22=Matte Tin

No. of Pins per Row  
 02~30

Pin length  
 See the drawing

Insulator Material  
 R=Nylon(Halogen Free)  
 C=LCP

Color  
 1=Black  
 2=White  
 3=Yellow  
 E=Beige

Contact Material  
 A/S/K/T=Phosphor Bronze  
 B/Z/H/W=Brass

Packing code  
 A=Box  
 B=Tray  
 C=Tube  
 D=Tape&Reel  
 E=Cap+Tube  
 F=Cap+Tape&Reel  
 G=Acetate Tape+Tube  
 H=Acetate Tape+Tape&Reel

**东莞市溪榜电子有限公司**  
 DONG GUAN XI BANG ELECTRONI CS CO., LTD.

REV. 01 UNIT. mm SCALE. 3:1 PAGE. 1/1

#### GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10


DWG. NO.  
**XB-PZ-D-254-105**

PART NO.  
**XB-PZ-D-254-105**

TITLE.  
**2.54 PIN HEADER  
 SINGLE ROW ENTRT SIDE  
 CONNECTOR**

### Specifications

Current Rating : 3.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 600V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C


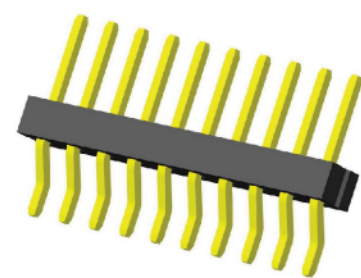


### Materials

Contact Material : Brass  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greennconn's requirements for environmental protection.

### Mating with

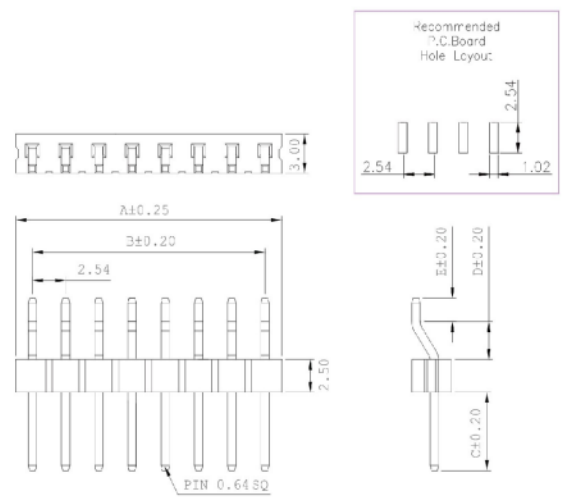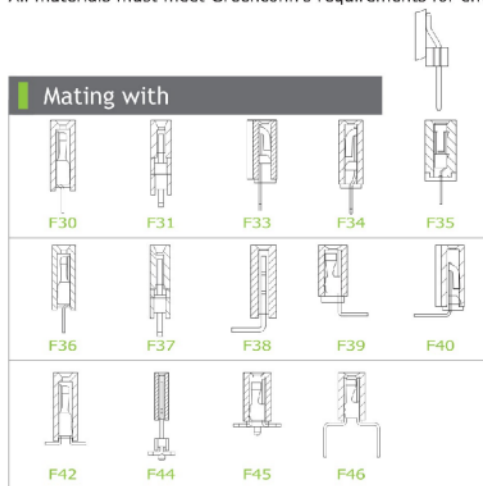

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
02	2.54	5.08	11	25.40	27.94	21	50.80	53.34
03	5.08	7.62	12	27.94	30.48	22	53.34	55.88
04	7.62	10.16	13	30.48	33.02	23	55.88	58.42
05	10.16	12.70	14	33.02	35.56	24	58.42	60.96
06	12.70	15.24	15	35.56	38.10	25	60.96	63.50
07	15.24	17.78	16	38.10	40.64	26	63.50	66.04
08	17.78	20.32	17	40.64	43.18	27	66.04	68.58
09	20.32	22.86	18	43.18	45.72	28	68.58	71.12
10	22.86	25.40	19	45.72	48.26	29	71.12	73.66
			20	48.26	50.80	30	73.66	76.20

**XB** 东莞市溪榜电子有限公司  
 Dong Guan Xi Bang Electronics Co., Ltd.

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE	
X' ± 5.0'	X ± 0.30
.X' ± 3.0'	.X ± 0.25
.XX' ± 2.0'	.XX ± 0.15
.XXX' ± 1.0'	.XXX ± 0.10

DESIGN: / DATE: /  
 CHECKED: / DATE: /  
 AUDITED: / DATE: /  
 APPROVED: / DATE: /

DWG. NO. XB-PZ-D-254-105  
 PART NO. XB-PZ-D-254-105

TITLE. 2.00 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.30H