

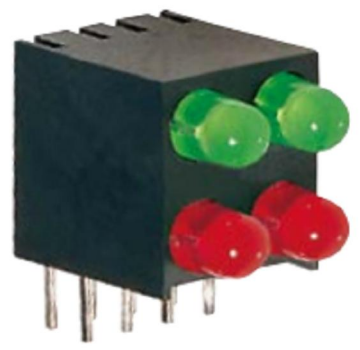
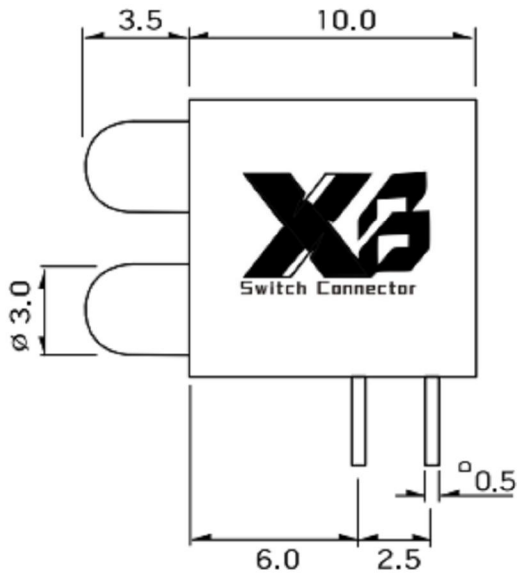



ROHS

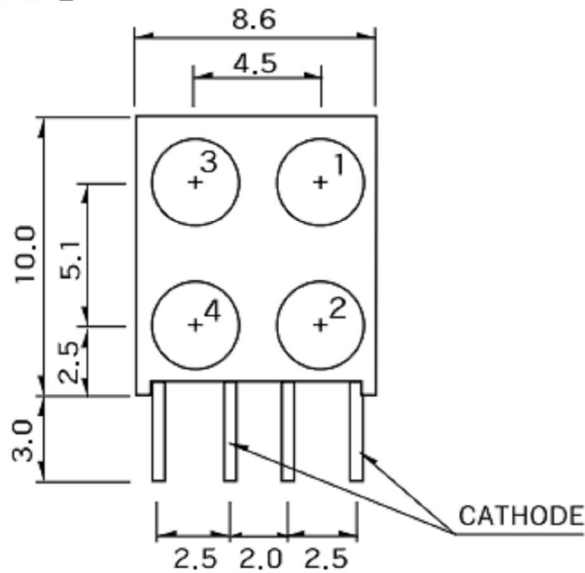

P.C.B DIMENSION

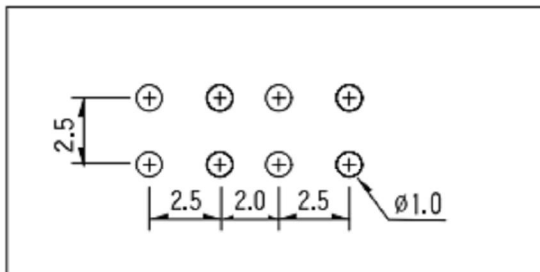

* Reverse Cathode Left :
SCF- **X****X****X****X** - **X****X****G**
Housing Color : Gray



Number	0	1 (Bi-Color)	2	3	4 (Bi-Color)	8	9
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue	White


Package	LED TYPE	Part No.	Chip		Lens	Absolute Maximum Ratings			Electro-optical Data(At 20mA)		Viewing Angle 2θ (1/2 @90°)			
			Emitted Color	Peak Wav Length (nm)		ΔI (mA)	Pd (mW)	If (mA)	Vf (V)	Iv Typ. (mcd)				
High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50	
		BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50	
		BL-BA1141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50	
		BL-DB141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50	
	02	BL-BB41Y1E	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45	
		BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50	
		BL-B2141K-L	Green	568	Green Diffused	30	16	7	-	1.9	2.3	7.0	50	
		BL-B3141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50	
	Integral Resistor 5V	03	BR-B4541K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-
			BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-
			BR-B3141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-
			BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-
Bi-color	07	BL-BE2171E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45	
		BL-BY2171E	Green	568	White Diffused	35	100	30	150	2.1	2.6	20.0	45	
1.0" Lead Flangeless	4.82	BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40	
		BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40	
		BL-B3133N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40	
		BL-B5134N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45	
	01	BL-B2134N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45	
		BL-B3134N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45	
		BL-BB41R4N	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45	
		BL-BE2174N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45	
	07	BL-BY2174N	Green	568	White Diffused	35	100	30	150	2.1	2.6	35.0	45	
		BL-BY2174N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45	
		BL-BY2174N	Green	568	White Diffused	30	100	30	150	2.2	2.6	35.0	45	
		BL-BY2174N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45	
T-1 3/4 1.0" Lead Standard	5.0	BL-BEG204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40	
		BL-BY204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40	
2.0x5.0x7.0 1.0" Lead Rectangular	5.0	BL-BY204	Green	568	White Diffused	35	100	30	150	2.1	2.6	30.0	40	
		BL-BY204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40	
		BL-PW7302B-R	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.0	80	
			Green	568		30	100	30	150	2.2	2.6	4.5	80	

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _f (V)	I _f =20mA	Over U'x1.2
Reverse current	I _r (uA)	V _r =5V	Over U'x2
Luminous intensity	I _v (mcd)	I _f =20mA	Below S'X0.5



东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED模块系列 XB LED MODULE Series
MODEL : XB-SCF-xxxx-xx



UNIT	MM	DWN.	ZENQ. CHEN	DATE	2024-4-8	TOLERANCE	ANGLE TOL	2	TERMINAL	PBS STRIP	3	Au PLATED
SCALE	7 : 1	CHK'D	DONG. PANG	DATE	2024-4-8	<=1.5mm ±0.1	±2°	1	CASE	PBT	1	BLACK
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-4-8	>1.5mm ±0.2		NO.	PART NAME	MATERIAL	QTY	FINISHING
						>=10mm ±0.3						