

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F





E

D

C

B

A

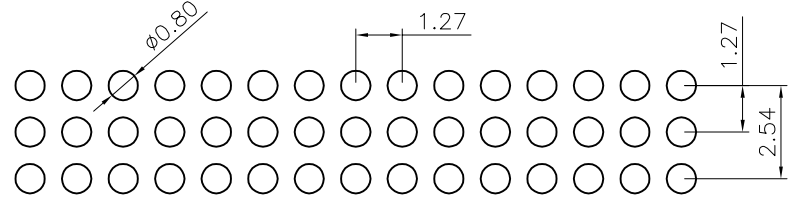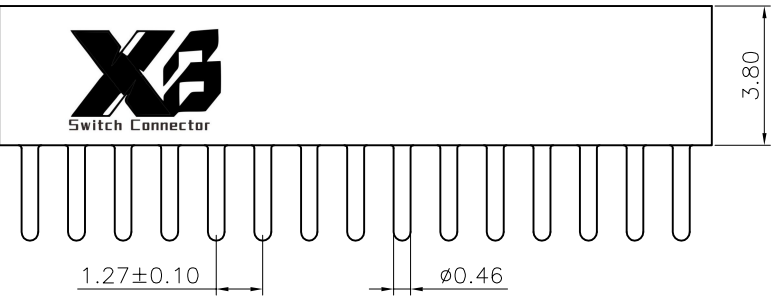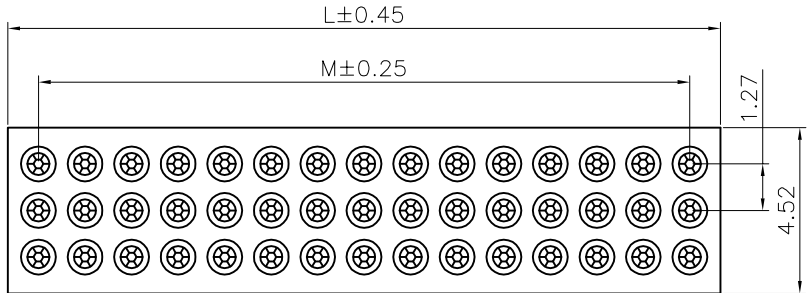

**P.C.B LAYOUT**

**Material:**  
 Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Insulator(black):Black (PA46) UL94V-0


**Electrical:**  
 Current rating:1Amps/contact max.  
 Contact resistance:≤4mΩ/contact  
 Insulation resistance:≥1000MΩ at V=500V  
 Dielectric Withstanding Voltage:1000V AC Min  
 Operating voltage:60VAC/DC

**Mechanical:**  
 Operating temperatures:Gold Plated:-55°C to+125°C  
 Tin plated:-40°C to+105°C  
 Soldering temperature:+260°C,10s max.

All materials must meet XI BANG hazardous substances control standards.

No. of PIN/ROW	M	L
02	1.27	2.74
03	2.54	4.01
04	3.81	5.28
05	5.08	6.55
06	6.35	7.82
07	7.62	9.09
08	8.89	10.36
09	10.16	11.63
10	11.43	12.90
11	12.70	14.17
12	13.97	15.44
13	15.24	16.71
14	16.51	17.98
15	17.78	19.25
16	19.05	20.52
17	20.32	21.79
18	21.59	23.06
19	22.86	24.33
20	24.13	25.60
21	25.40	26.87
22	26.67	28.14
23	27.94	29.41
24	29.21	30.68
25	30.48	31.95
26	31.75	33.22
27	33.02	34.49
28	34.29	35.76
29	35.56	37.03
30	36.83	38.30
31	38.10	39.57
32	39.37	40.84
33	40.64	42.11
34	41.91	43.38
35	43.18	44.65
36	44.45	45.92
37	45.72	47.19
38	46.99	48.46
39	48.26	49.73
40	49.53	51.00

Ordering Information

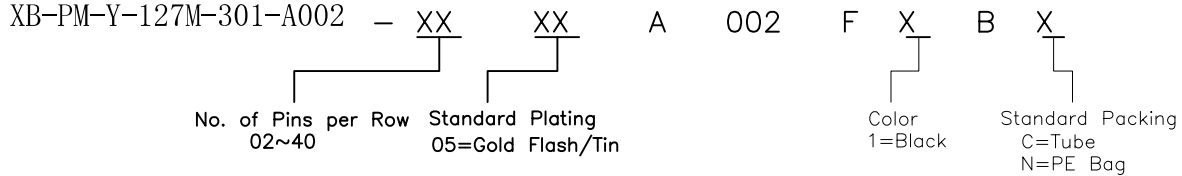

**东莞市溪榜电子有限公司**  
 DONG GUAN XI BANG ELECTRONICS CO.,LTD

REV. A    UNIT. mm    SCALE. 1:1

3RD.ANG PROJ.  
 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0'	X.±0.50
.X.*±5.0'	.X±0.30
.XX.*±5.0'	.XX±0.20
.XXX.*±5.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	TITLE.
XB-PM-Y-127M-301-A002	Pitch 1.27mm SIP Socket Three Row
PART NO.	

M4 1 2 3 4 5 6 7 8 9