




1 2 3 4 5 6 7 8 9

F

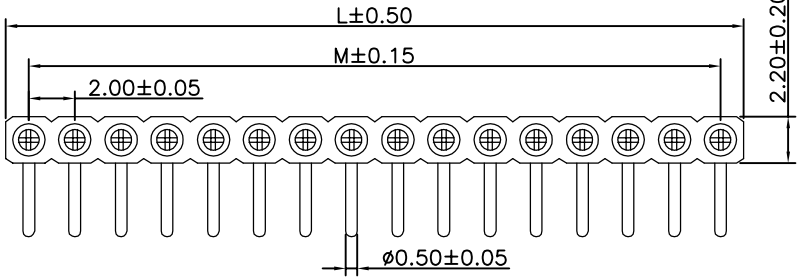

No. of PIN/ROW	M	L
01	0	2.00
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.50

E

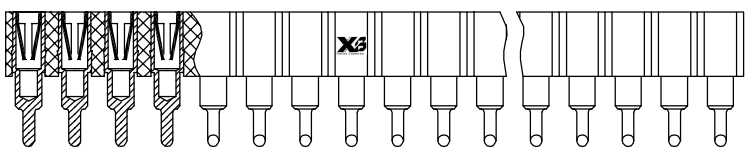


**Specifications**  
 Rated current: 2 A  
 Contact resistance: max 10 mΩ  
 Dielectric strength: min 500 V RMS  
 Mating pins: Outside Diameter 0.40 to 0.66 mm  
 Forces: (polished steel gauge  
 Outside Diameter 0.46 mm)  
 Insertion: 2.5N typ  
 Withdrawal: 0.7N typ  
**Materials**  
 Contact Material: Brass  
 Insulation Material: High Temperature  
 Thermoplastic UL94V-0 PPS  
 All materials must meet XI BANG  
 hazardous substances control standards.

D

C

### Ordering Information

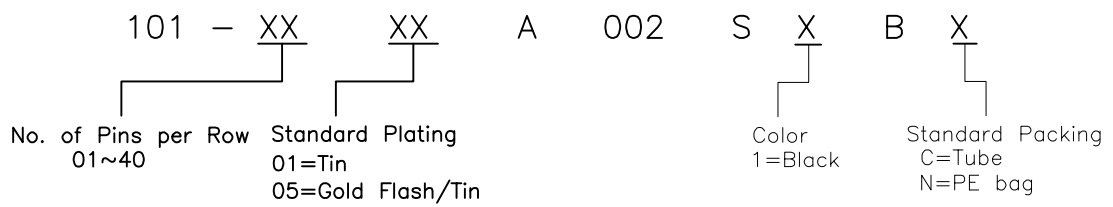

B

A

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE. 2.00mm SIP Socket H2.80mm L9.4/13.4mm RA Type
	PAGE. 1/1	X.*±3.0'	X.±/	CHECKED:	DATE:	XB-PM-Y-20M-101-A002	
		.X*±/	.X±0.30	APPROVED:	DATE:	PART NO.	
REV. A	UNIT. mm	SCALE. 1:1	.XX*±/	.XX±0.25	DATE:		
			.XXX*±/	.XXX±0.20			

AV 1 2 3 4 5 6 7 8 9